

## CIRCULAR INLUX SUSPENDED

FICHA TÉCNICA · FICHE TECHNIQUE · HOJA DE DATOS



Screwed Diffuser /  
Difusor Aparafusado /  
Diffuseur Vissé /  
Difusor Atornillado

### EN

#### Circular Inlux Suspended · Description

Circular luminaire in aluminum, with ultra thin profile. With frosted screwed diffuser and homogeneous and uniform lighting over the entire surface.

### PT

#### Circular Inlux Suspensa · Descrição

Luminária circular em alumínio, com perfil ultra fino. Com difusor fosco aparafusado e iluminação homogénea e uniforme em toda a superfície.

### FR

#### Circular Inlux Suspendu · Description

Luminaire circulaire en aluminium, au profil ultra-mince. Avec diffuseur vissé dépoli et éclairage homogène et uniforme sur toute la surface.

### ES

#### Circular Inlux Suspendida · Descripción

Luminaria circular de aluminio, con perfil ultraplano. Con difusor esmerilado atornillado e iluminación homogénea y uniforme en toda la superficie.



POWERED BY **TRIDONIC** LED BY **OSRAM**

### AVAILABLE MEASUREMENTS / MEDIDAS DISPONÍVEIS



MESURES DISPONIBLES / MEDIDAS DISPONIBLES

#### LED

L1 (mm)	w	Lumens
Ø800	70	9000
Ø1000	88	11300
Ø1200	105	13500

### TECHNICAL DRAWING / DESENHO TÉCNICO

DESSIN TECHNIQUE / DIBUJO TÉCNICO

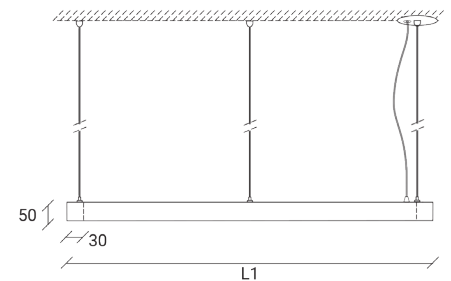

### Other dimensions on request

Outras dimensões sob consulta.

Autres dimensions sur demande

Otras dimensiones bajo pedido.

All information in this document is subject to change without notice. / Todas as informações disponibilizadas neste documento podem ser alteradas sem prévio aviso. /

Toutes les informations contenues dans ce document sont susceptibles d'être modifiées sans préavis. / Toda la información disponible en este documento está sujeta a cambios sin previo aviso.

Mod. 095

TECHNICAL CHARACTERISTICS / CARACTERÍSTICAS TÉCNICAS / CARACTÉRISTIQUES TECHNIQUES

**COLOUR STABILITY** / ESTABILIDADE DA COR  
STABILITÉ DES COULEURS / ESTABILIDAD DEL COLOR

3 SDCM

**DIFFUSER** / DIFUSOR / DIFFUSEUR

Satin Polycarbonate / Policarbonato Satinado / Polycarbonate satiné

**LIGHT DISTRIBUTION** / DISTRIBUIÇÃO DE LUZ  
DISTRIBUTION DE LA LUMIÈRE / DISTRIBUCIÓN DE LA LUZ

Indirect  
Indireta  
Indirecte  
Indirecta

**OPTIONS** / OPÇÕES / OPTIONS / OPCIONES

Control / Controlo /  
Contrôle / Control

DALI

**MOUNTING** / MONTAGEM / MONTAGE / MONTAJE

Suspended / Suspensa / Suspendu / Suspendida

**LED LIFETIME** / VIDA ÚTIL DO LED  
DURÉE DE VIE DES LED / VIDA ÚTIL DEL LED

50.000 hours / horas / heures  
L80F10 (Ta=25°C)

**LED MODULE** / MÓDULO LED / MODULE LED

2700k / 3000k / 4000k


Other colour temperatures on request.

Outras temperaturas de cor sob consulta.

Autres températures de couleur sur demande.

Otras temperaturas de color bajo pedido.

**PHOTOMETRY** / FOTOMETRIA / PHOTOMÉTRIE / FOTOMETRÍA

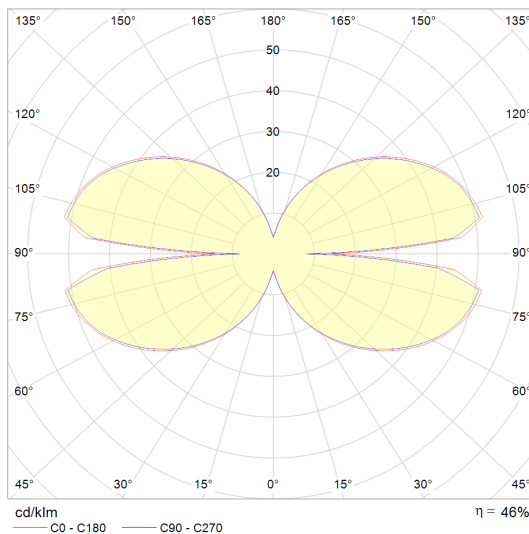

IP IRC  
20 > 80

**FINISHES** / ACABAMENTO / FINITION / ACABADO



Corten steel and other RAL colours on request.

Aço Corten e outras cores RAL sob consulta.

Acier Corten et autres couleurs RAL sur demande.

Acero corten y otros colores RAL bajo pedido.

\* Matte Textured / Mate Texturado / Mat Texturé / Textura Mate

**COMPONENTS / COMPONENTES / COMPOSANTS**

**SUSPENSION BASE / BASE DE SUSPENSÃO**  
**BASE DE SUSPENSION / BASE DE SUSPENSION**

**Round Surface Central Fixing Base (option 1)**  
 Base de fixação central redonda saliente (opção 1)  
 Base de fixation centrale surface ronde (option 1)  
 Base de fijación central de superficie redonda (opción 1)



**Square Surface Fixing Base (option 2)**  
 Base de fixação quadrada saliente (opção 2)  
 Base de fixation à surface carrée (option 2)  
 Base de fijación de superficie cuadrada (opción 2)



**Round Surface Central Fixing Base (option 3)**  
 Base de fixação central redonda saliente (opção 3)  
 Base de fixation centrale surface ronde (option 3)  
 Base de fijación central de superficie redonda (opción 3)



**Round Recessed Fixing Base (option 4)**  
 Base de fixação redonda encastrada (opção 4)  
 Base de fixation rond encastré (option 4)  
 Base de fijación empotrada redonda (opción 4)



**Round Surface Fixing Base (option 5)**  
 Base de fixação redonda saliente (opção 5)  
 Base de montage surface rond (option 5)  
 Base de fijación de superficie redonda (opción 5)



**Round Surface Central Fixing Base (option 6)**  
 Base de fixação central redonda saliente (opção 6)  
 Base de fixation centrale surface ronde (option 6)  
 Base de fijación central de superficie redonda (opción 6)



**Possible Finishes / Acabamentos Possíveis**

Finitions Possibles/ Posibles Acabados

WHITE BRANCO BLANC BLANCO	BLACK PRETO NOIR NEGRO	GRAY CINZENTO GRIS GRIS	ANTHRACITE ANTRACITE ANTHRACITE ANTRACITA	CORTEN

**SUSPENSION CABLE / CABO DE SUSPENSÃO**  
**CÂBLE DE SUSPENSION / CABLE DE SUSPENSION**

Available Measurements / Medidas Disponíveis  
 Mesures Disponibles / Medidas Disponibles

1,2m - 2m - 3m - 5m



**POWER CABLES / CABOS DE ALIMENTAÇÃO**  
**CÂBLES D'ALIMENTATION / CABLES DE ALIMENTACIÓN**

**Should maintain the length selected previously for the steel cables**

Deverão manter o comprimento selecionado anteriormente para os cabos de aço

Doivent conserver la longueur choisie précédemment pour les câbles d'acier.

Deben mantener la longitud seleccionada previamente para los cables de acero

