



INFINITY COOL SUSPENDED

INFINITY COOL SUSPENDED


BEGOLUX

TECH SHEET | FICHE TECHNIQUE

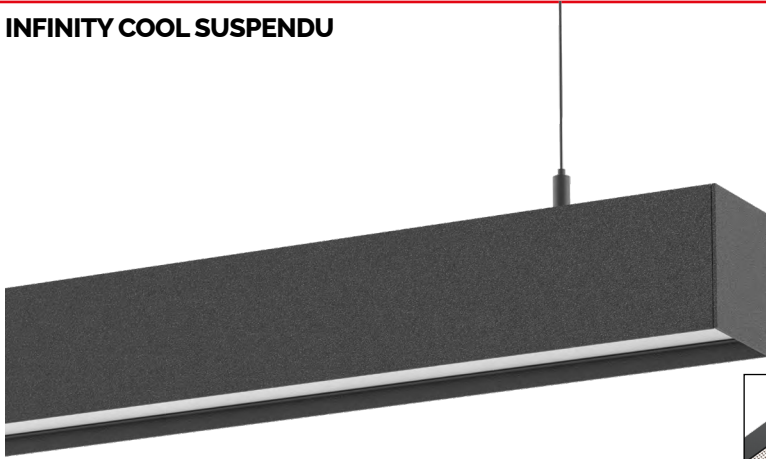

POWERED BY
TRIDONIC

LED BY
TRIDONIC OSRAM



Dif. Microp.

Dif. Opal.

PRODUCT DESCRIPTION

- Luminaire suspended in aluminum profile;
- Supplied with matte or microprismatic diffuser recessed;
- Equipped with PCB LED;
- Supplied with 1,2m long suspension cables;
- Standard or other lengths, produced at the customer's request;
- Ideal for individual applications.

DESCRIPTION DU PRODUIT


- Luminaire suspendu en profilé aluminium;
- Livré avec diffuseur mat ou microprismatique encastré;
- Equipé de PCB LED;
- Fourni avec des câbles de suspension de 1,2 m de long;
- Longueurs standard ou autres, produites à la demande du client;
- Idéal pour les applications individuelles.

AVAILABLE MEASURES | MESURES DISPONIBLES


LED		
L1 (mm)	W	Lumens
568	18	2446
708	20	2700
848	23	3300
988	28	3900
1128	30	4300
1268	35	4900
1408	37	5500
1548	42	6100
1688	45	6500
1828	48	7100
1968	51	7600
2108	57	8200
2248	60	8700
2388	64	9300
2528	70	9700
2668	73	10300
2808	77	10900
2948	80	11400
3090	84	11900

Microprismatic Diffuser UGR <19 / Diffuseur Microprismatique UGR <19
Other dimensions on request. / Autres dimensions sur demande.

TECHNICAL DRAWING | DESSIN TECHNIQUE

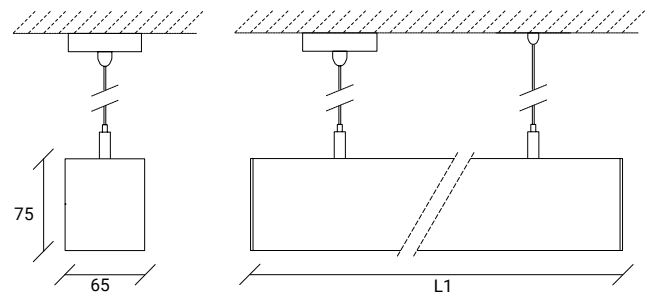

PHOTOMETRY | PHOTOMÉTRIE

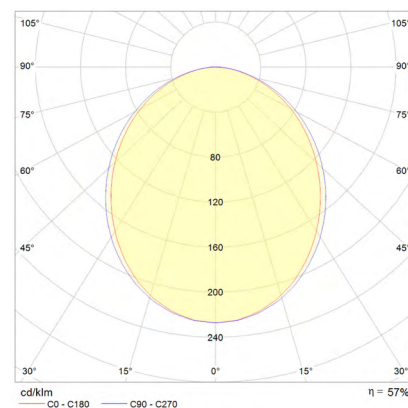

All information provided in this document may be changed without notice.
Toutes les informations fournies dans ce document peuvent être modifiées sans préavis.

TECHNICAL CHARACTERISTICS / CARACTÉRISTIQUES TECHNIQUES

COLOR STABILITY / STABILITÉ DES COULEURS

3 SDCM

IP

40

IRC

> 80%

PHOTOBIOLOGICAL RISK / RISQUE PHOTOBIOLOGIQUE

RG1 Certification - Photobiological Risk 1 (RG0 On Request)
Certification RG1 - Risque photobiologique 1 (RG0 sur Demande)

OPTIONS / OPTIONS

DALI Control / 1-10V Regulation / Emergency Kit
Contrôle DALI / Régulation 1-10V / Kit d'urgence

DIFFUSER / DIFFUSEUR

Satin Polycarbonate (Transparent Microprismatic Option)
Polycarbonate Satiné (Option Microprismatique Transparente)

SUSPENSION BASE / BASE DE SUSPENSION

Base Surface Simple Fixation (option 1)
Base de Fixation Simple Surface (option 1)



Recessed Fixing Base (option 2)
Base de Fixation Encastré (option 2)



Other colors on request.
Autres couleurs sur demande.

ASSEMBLY / ASSEMBLÉE

Suspended
Suspendu

LED LIFE / DURÉE DE VIE DES LED

50.000 hours L80F10 (Ta=25°C)
50.000 heures L80F10 (Ta=25°C)

SUSPENSION CABLE / CÂBLE DE SUSPENSION

Standard 1,2m
Standard 1,2m

Autres mesures sur demande.
Other measures on request.



LED OPENING / OUVERTURE LED

120°

LIGHT DISTRIBUTION / DISTRIBUTION LUMINEUSE

Direct
Direct

LED MODULE / MODULE LED

LED Module 2700k / 3000k / 4000k / 5000k / 6500k
Module LED 2700k / 3000k / 4000k / 5000k / 6500k

Autres températures de couleur sur demande.
Other color temperatures on request.

FINISHING / FINITION

RAL 9003 White*
 RAL 9005 Black*
 RAL 9006 Gray*
 RAL 7016 Anthracite
 Corten

Other RAL colors on request. / Autres couleurs RAL sur demande.
**Textured Mate / Mate texturé*

